

Calcite is a crushed and screened white marble media which can inexpensively be used to neutralize acidic or low pH waters to a neutral, less corrosive effluent.

Calcite is a naturally occurring calcium carbonate media. One of the advantages of Calcite is its self-limiting property. When properly applied, it corrects pH only enough to reach a non-corrosive equilibrium. It does not over-correct under normal conditions. Upon contact with Calcite, acidic waters slowly dissolve the calcium carbonate to raise the pH which reduces the potential leaching of copper, lead and other metals found in typical plumbing systems. Periodic backwashing will prevent packing, reclassify the bed and maintain high service rates. Depending on pH, water chemistry and service flow, the Calcite bed will have to be periodically replenished as the Calcite is depleted.

As the Calcite's calcium carbonate neutralizes the water, it will increase hardness and a softener may become necessary after the neutralizing filter.

ADVANTAGES

- Naturally occurring material
- Low uniformity coefficient for maximum contact for controlled pH correction
- Slower reacting for controlled pH correction
- Inexpensive



PHYSICAL PROPERTIES

- Color: Near white
- Bulk Density: 90 lbs./cu. ft.
- Mesh Size: 16 x 40
- Specific Gravity: 2.7
- Effective Size: 0.4 mm
- Uniformity Coefficient: 1.5
- Hardness: 3.0 (Mohs scale)
- Composition: CaCO₃, 95% min.
MgCO₃, 3.0% max.

CONDITIONS FOR OPERATION

- A gravel support bed is recommended
- Water pH range: 5.0-7.0
- Bed depth: 24-30 in.
- Freeboard: 50% of bed depth (min.)
- Backwash rate: 8-12 gpm/sq. ft.
- Backwash Bed Expansion: 35% of bed depth
- Service flow rate: 3-6 gpm/sq. ft. but may be modified to adapt to local conditions



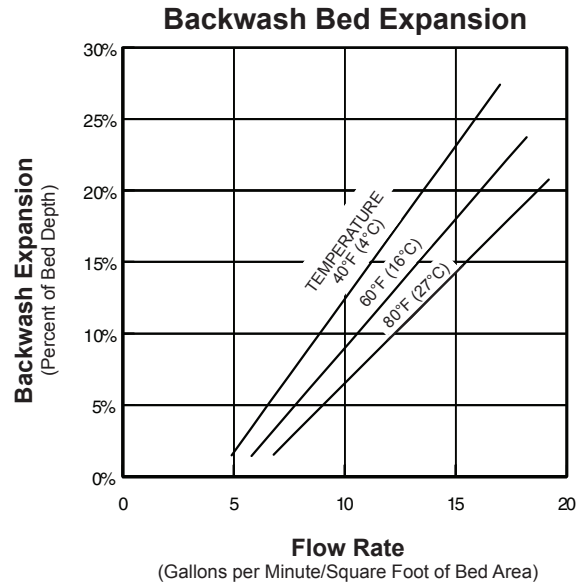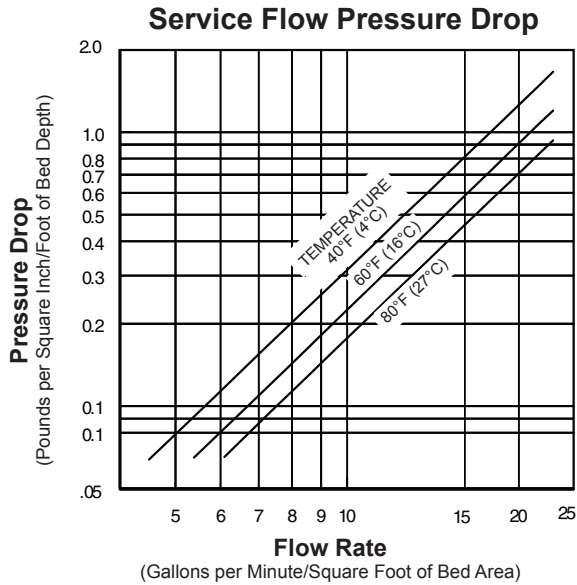

Certified to NSF/ANSI Standard 60

Description	Cu. Ft./Bag	Wt./Cu. Ft.*
Calcite	.55 (50 lbs.)	90 lbs.

*Weight per cubic foot is approximate.

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, HALO Water Systems makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.